



optoSiC+ XY100G

ultra-high performance 100mm aperture generic scanning mirrors

optoSiC® XY100G generic scanning mirrors are designed using optoSiC GmbH’s protected spine and rib structure for post-objective laser scanning systems using a 100.0mm full beam aperture with focal lengths between 5 and 10 metres.

These mirrors are manufactured from optoSiC+ optical grade Silicon Carbide to give optimum stiffness, dynamic flatness and high resonant frequencies under high torque loadings while offering low Moment of Inertia for all scanning applications where processing speed and performance is paramount.


optoSiC® XY100G generic scanning mirrors are available polished to $1/4\lambda$ rms flatness @632.8nm and either coated with UltraMAX R for CO₂, or opto-1064 R for single Nd:YAG wavelengths. Please refer to optoSiC GmbH Technical Datasheets 402 and 404 for specific details of these coatings. Other coatings are available on request.

optoSiC+ XY100G Generic Scanning Mirror Specifications:

Density	>3.16g/cm ³		
Flexural Strength	510 Mpa (DIN EN 843-1)		
Compressive Strength	2200 MPa		
Young’s Modulus [E]	420 Gpa (DIN EN 843-2)		
Poisson’s Ratio	0.17 n		
Surface Roughness	Ra. ≥0.3273nm (pre-coated)		
CTE	4.1 α [10 ⁻⁶ /°K] 20-500°C (DIN EN 821-1)		
	X	Y	
Mass (g)*	216.09	495.42	
Moment of Inertia (g*cm.2)*	1,987	2,899	
Resonant Frequency (kHz)*	3.21	0.99	(1 st bending)
	4.171	3.371	(1 st twisting)
Dynamic Flatness (λ)*	1/4.032	1/3.962	
	(at λ = 632.8nm per 1,000 rad/sec ²)		
Central Angle of Incidence (°)	45	36.5	
X-Y Separation	126.5mm		
X-Tilt	-17°		
Mechanical Scan Angle	±10°		
Aperture	100.0mm full beam (see layout drawing)		


**Modelled using CATIA, Patran and ANSYS softwares*

ISOMETRIC VIEW

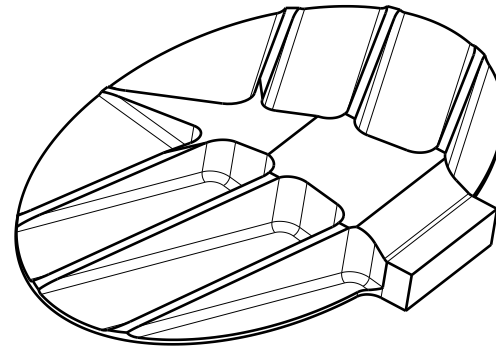

4. FILLET RADII R2 AND CORNER RADII R6 UNLESS OTHERWISE STATED/MODELLED




3. BREAK SHARP EDGES



2. TOLERANCES NOT STATED:

LENGTHS <50mm = ±0.2mm
 LENGTHS >50mm AND <150mm = ±0.3mm

1. PART SYMMETRICAL AROUND CENTRE LINE

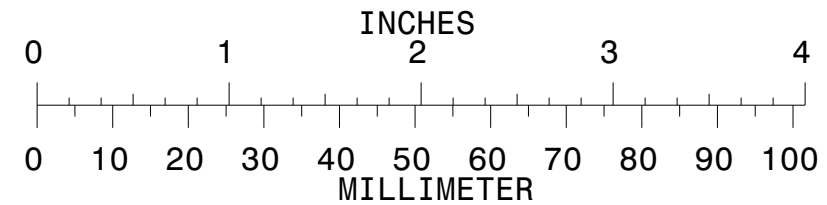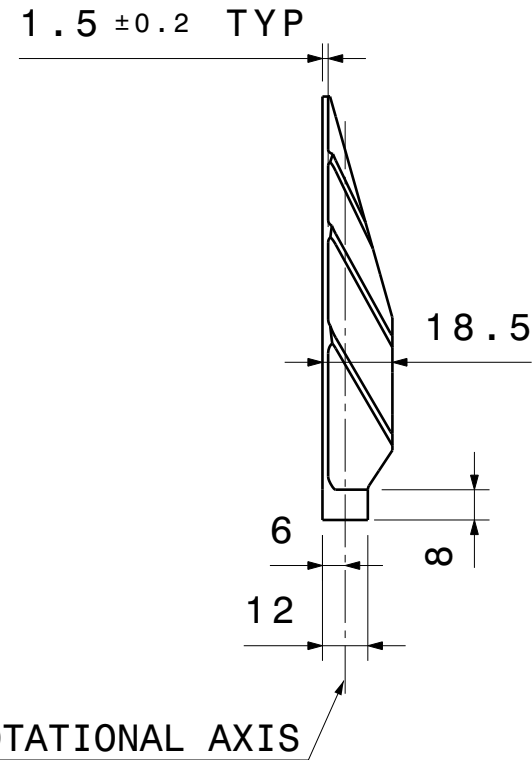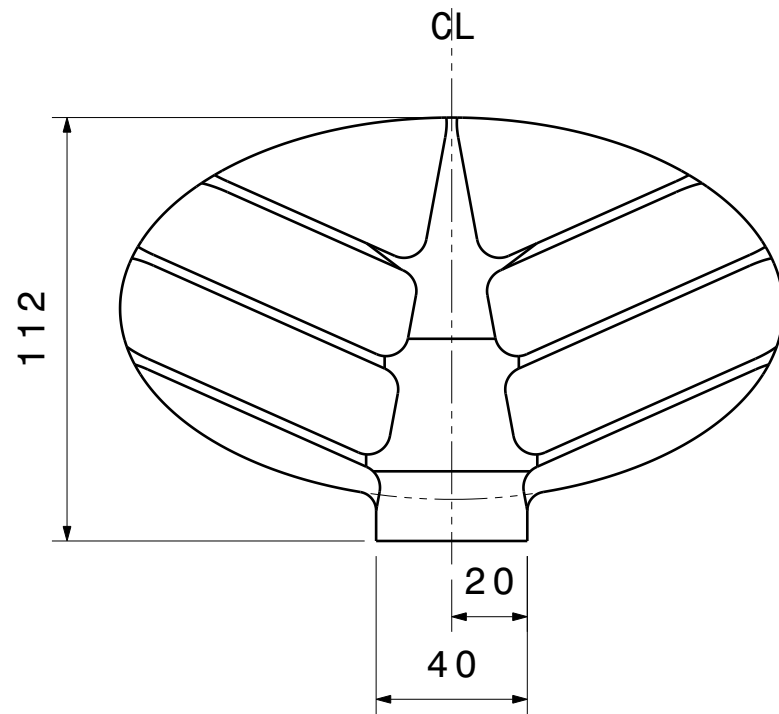


COMPUTER PRODUCED DRAWING USING CATIA V5. NO MANUAL ALTERATION

This document and all information contained herein is the sole property of optoSiC GmbH. No intellectual property rights are granted by the delivery of this document or the disclosure of its content. This document shall not be reproduced or disclosed to a third party without the express written consent of optoSiC GmbH. This document and its content shall not be used for any purpose other than that for which it is supplied. The statements made herein do not constitute an offer. They are based on the mentioned assumptions and are expressed in good faith. Where the supporting grounds for these statements are not shown, optoSiC GmbH will be pleased to explain the basis thereof. © optoSiC GmbH(2009) All rights reserved. Confidential and proprietary document.

LIMITS NOT STATED: ISO 8015	SURFACE FINISH: ✓		FIRST ANGLE PROJECTION ⊕	
	NAME	DATE	MATERIAL NUMBER:	
	DRAWN	07.07.2009		
	STRESS	07.07.2009	SCALE: 1:2	SIZE A3
	APPROVED	07.07.2009	SHEET: 01 / 01	


TITLE	DRAWING NUMBER
MIRROR X100	X100G
A	
ISSUE	

ISOMETRIC VIEW

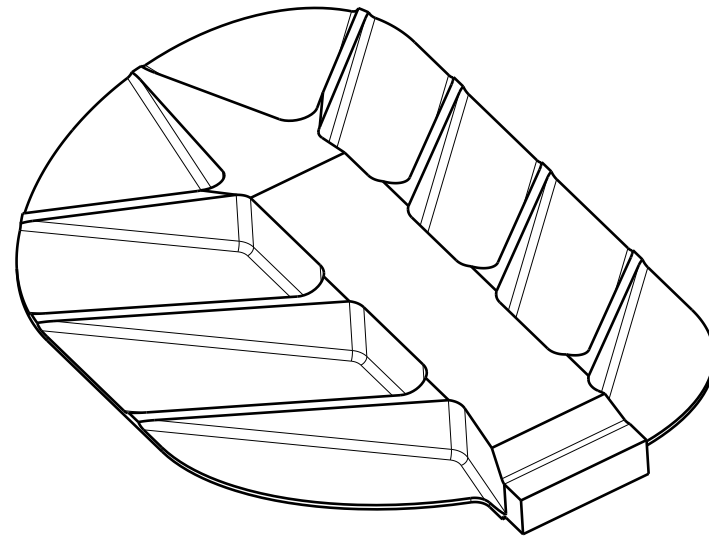




3. FILLET RADII R2 AND CORNER RADII R6 UNLESS OTHERWISE STATED/MODELLED

2. BREAK SHARP EDGES



1. TOLERANCES NOT STATED:

LENGTHS <50mm = ±0.2mm
 LENGTHS >50mm AND <150mm = ±0.3mm

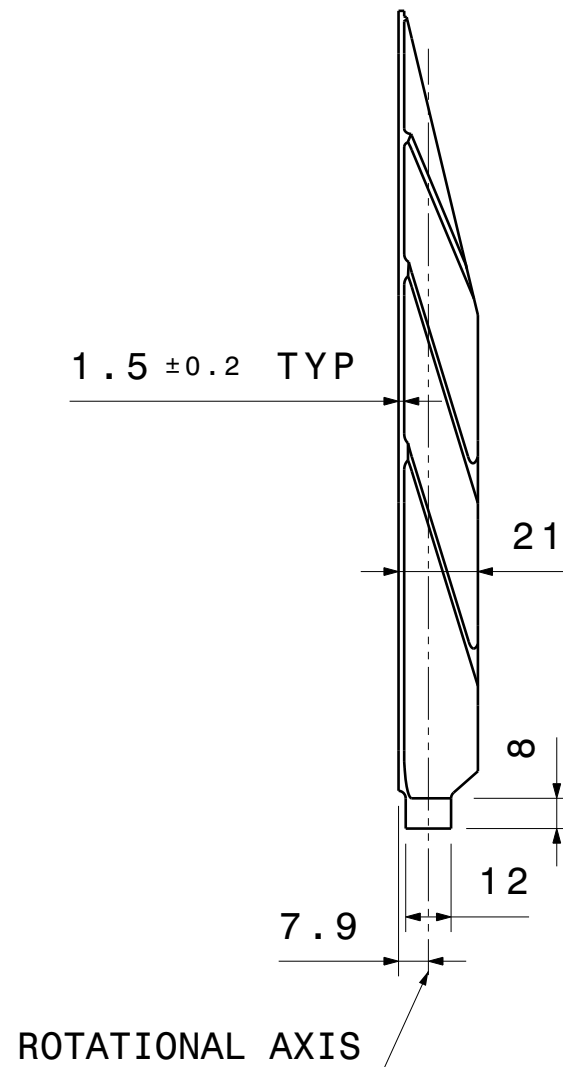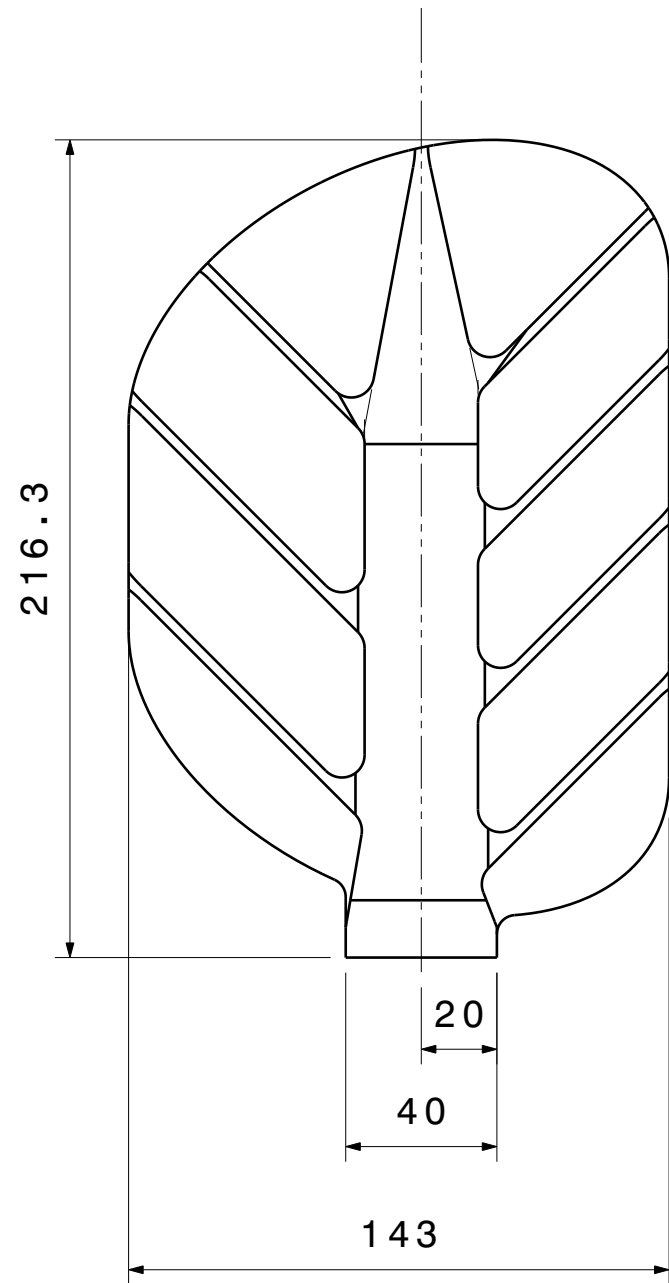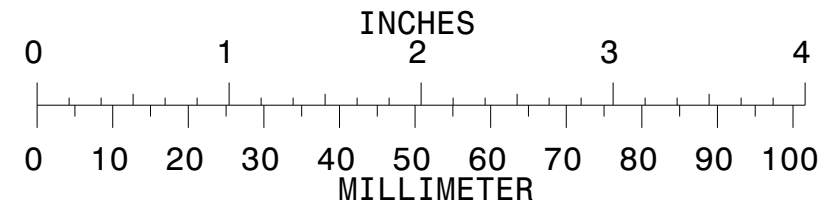


COMPUTER PRODUCED DRAWING USING CATIA V5. NO MANUAL ALTERATION

This document and all information contained herein is the sole property of optoSiC GmbH. No intellectual property rights are granted by the delivery of this document or the disclosure of its content. This document shall not be reproduced or disclosed to a third party without the express written consent of optoSiC GmbH. This document and its content shall not be used for any purpose other than that for which it is supplied. The statements made herein do not constitute an offer. They are based on the mentioned assumptions and are expressed in good faith. Where the supporting grounds for these statements are not shown, optoSiC GmbH will be pleased to explain the basis thereof. © optoSiC GmbH(2009) All rights reserved. Confidential and proprietary document.



LIMITS NOT STATED: ISO 8015	SURFACE FINISH: ✓		FIRST ANGLE PROJECTION 	
	NAME	DATE	MATERIAL NUMBER:	
DRAWN	ASPINDLE	07.07.2009		
STRESS	RATCLIFFE	07.07.2009	SCALE: 1:2	SIZE A3
APPROVED	S.HASTINGS	07.07.2009	SHEET: 01 / 01	

TITLE	DRAWING NUMBER
MIRROR Y100	Y100G
A	
ISSUE	



FRONT VIEW
SHOWING MIRRORS AT 0°, +10° AND -10°

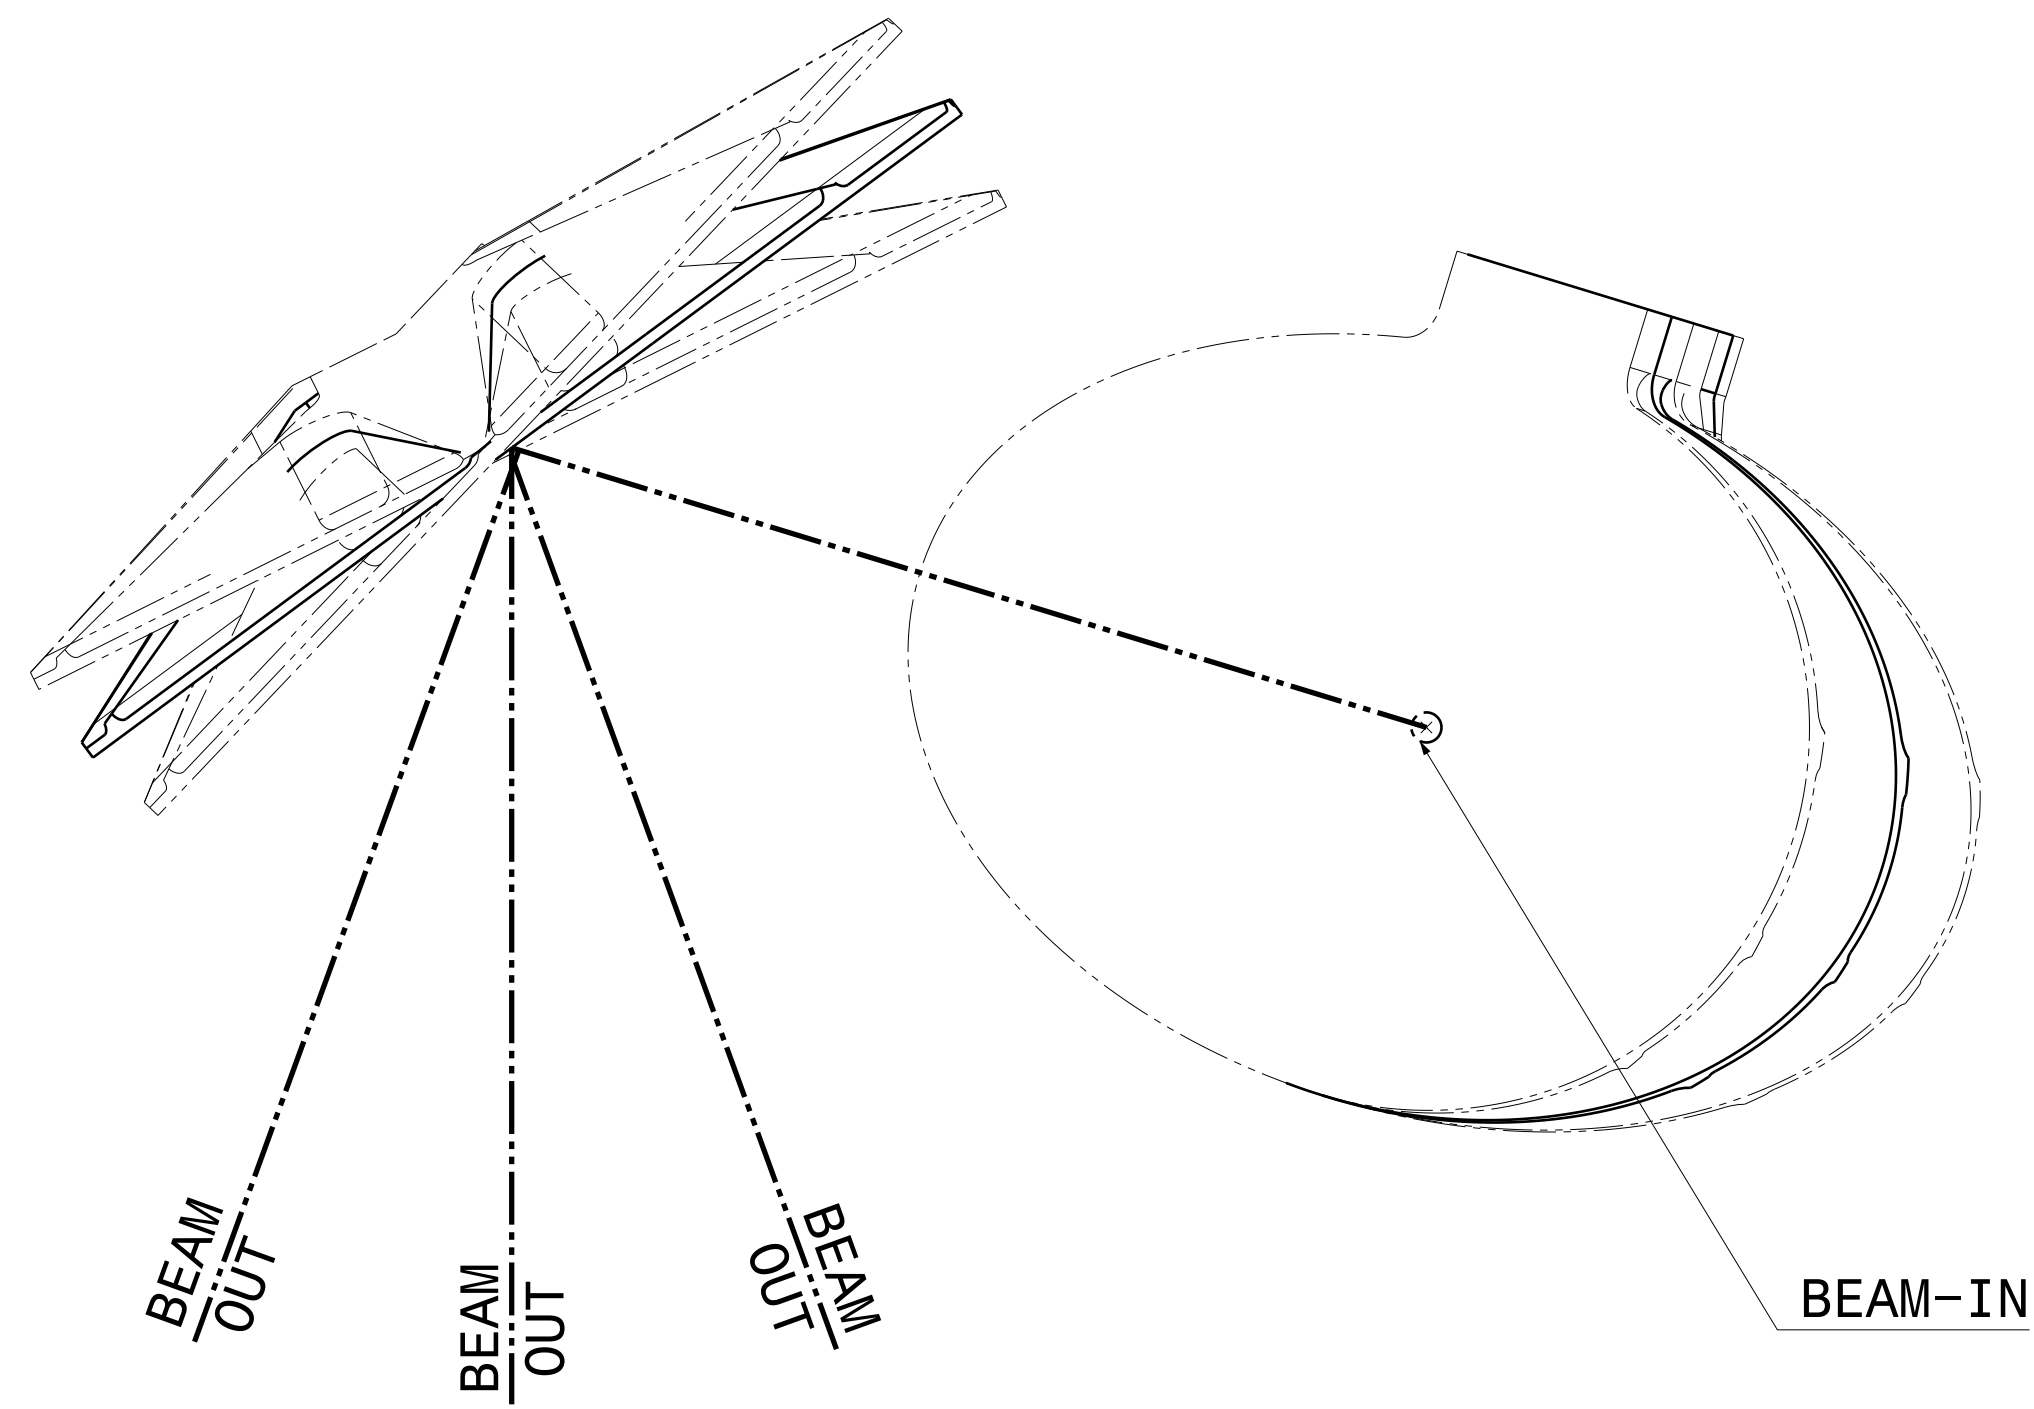


ISOMETRIC VIEW
SHOWING MIRRORS AT 0°, +10° AND -10°

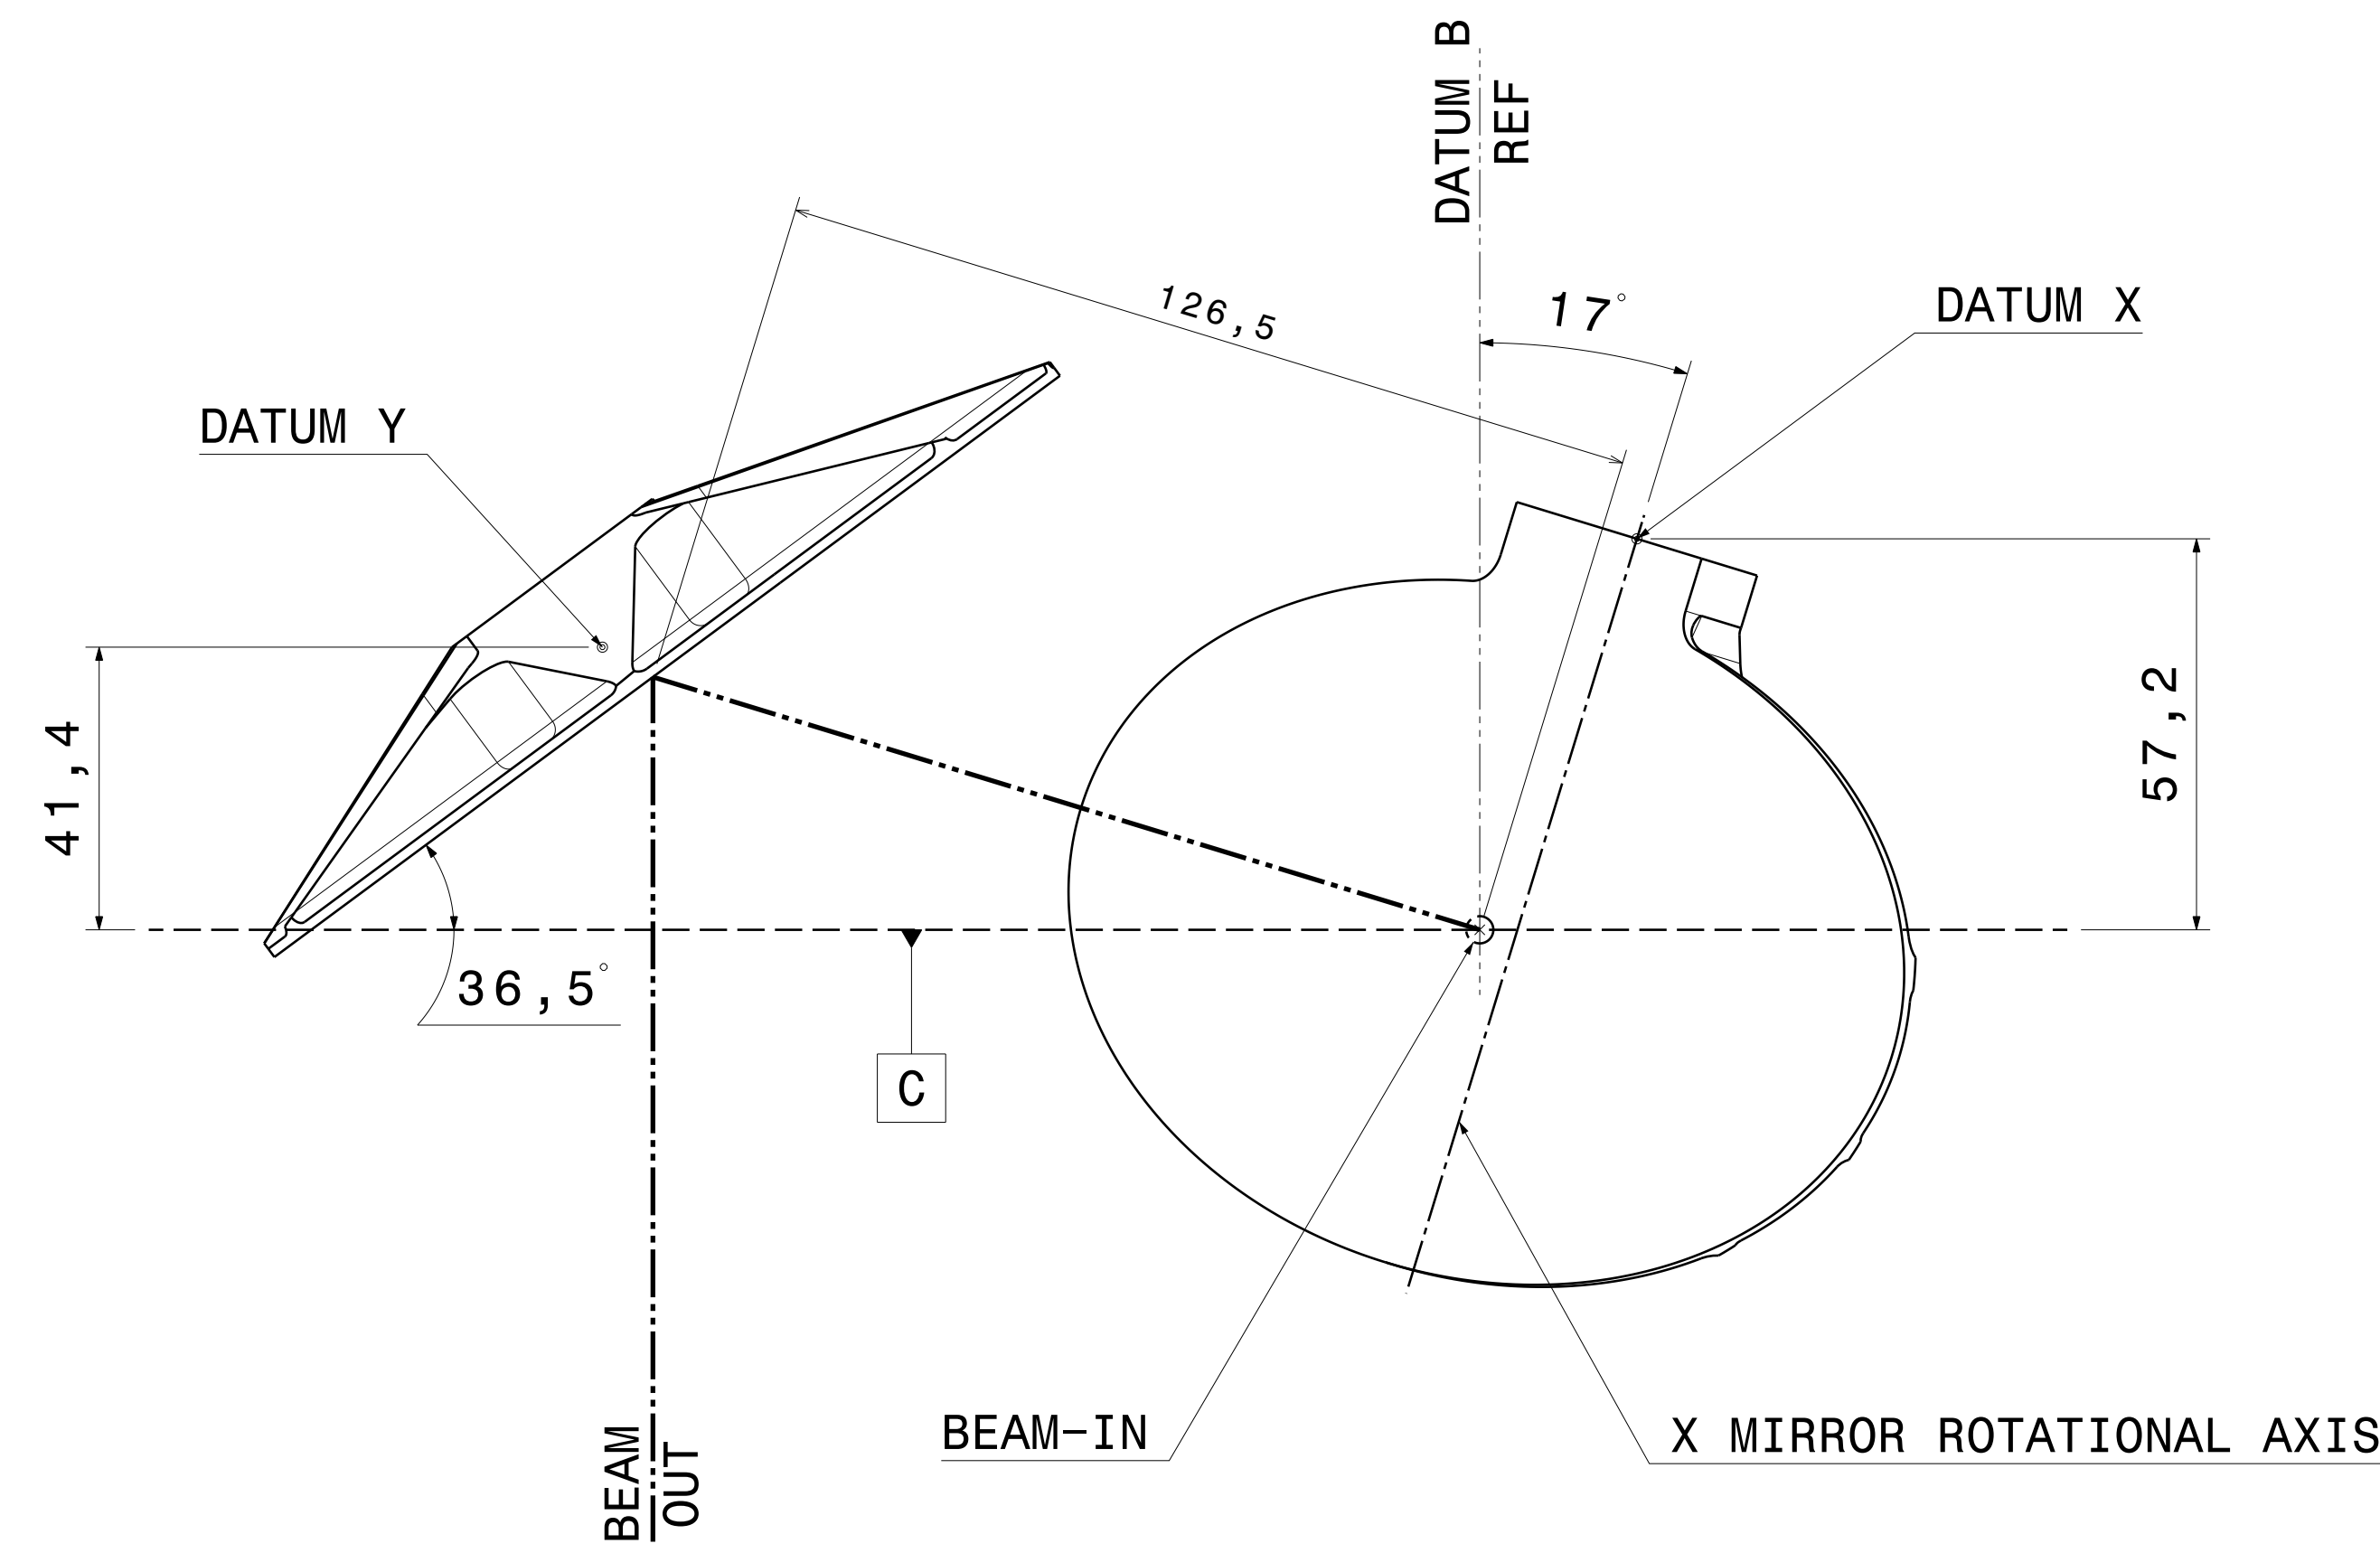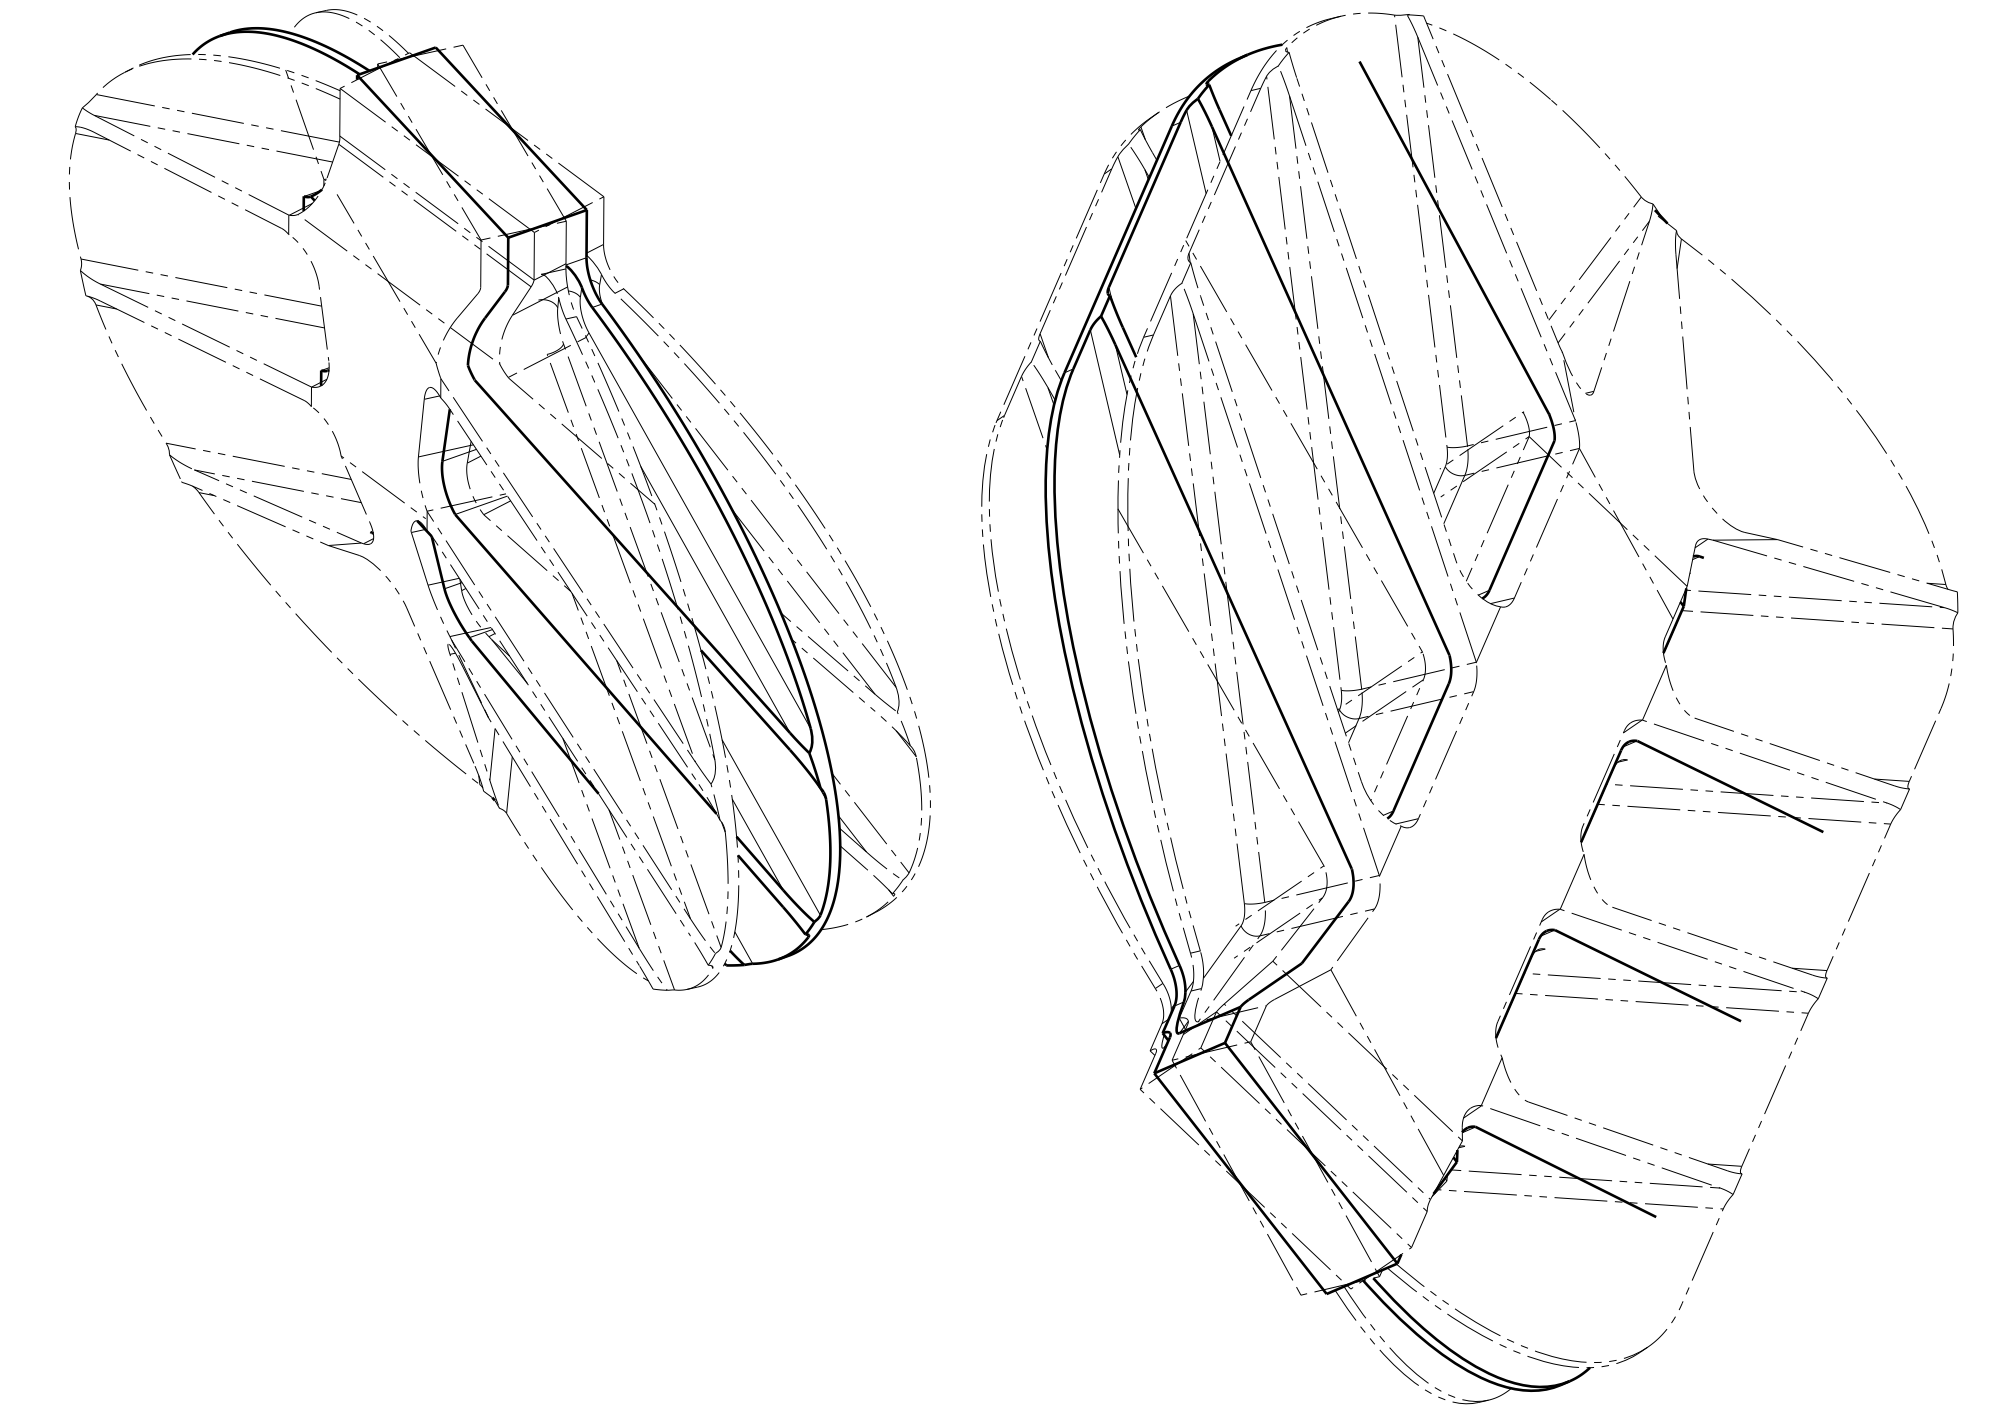

PLAN VIEW
SHOWING MIRRORS AT 0°, +10° AND -10°

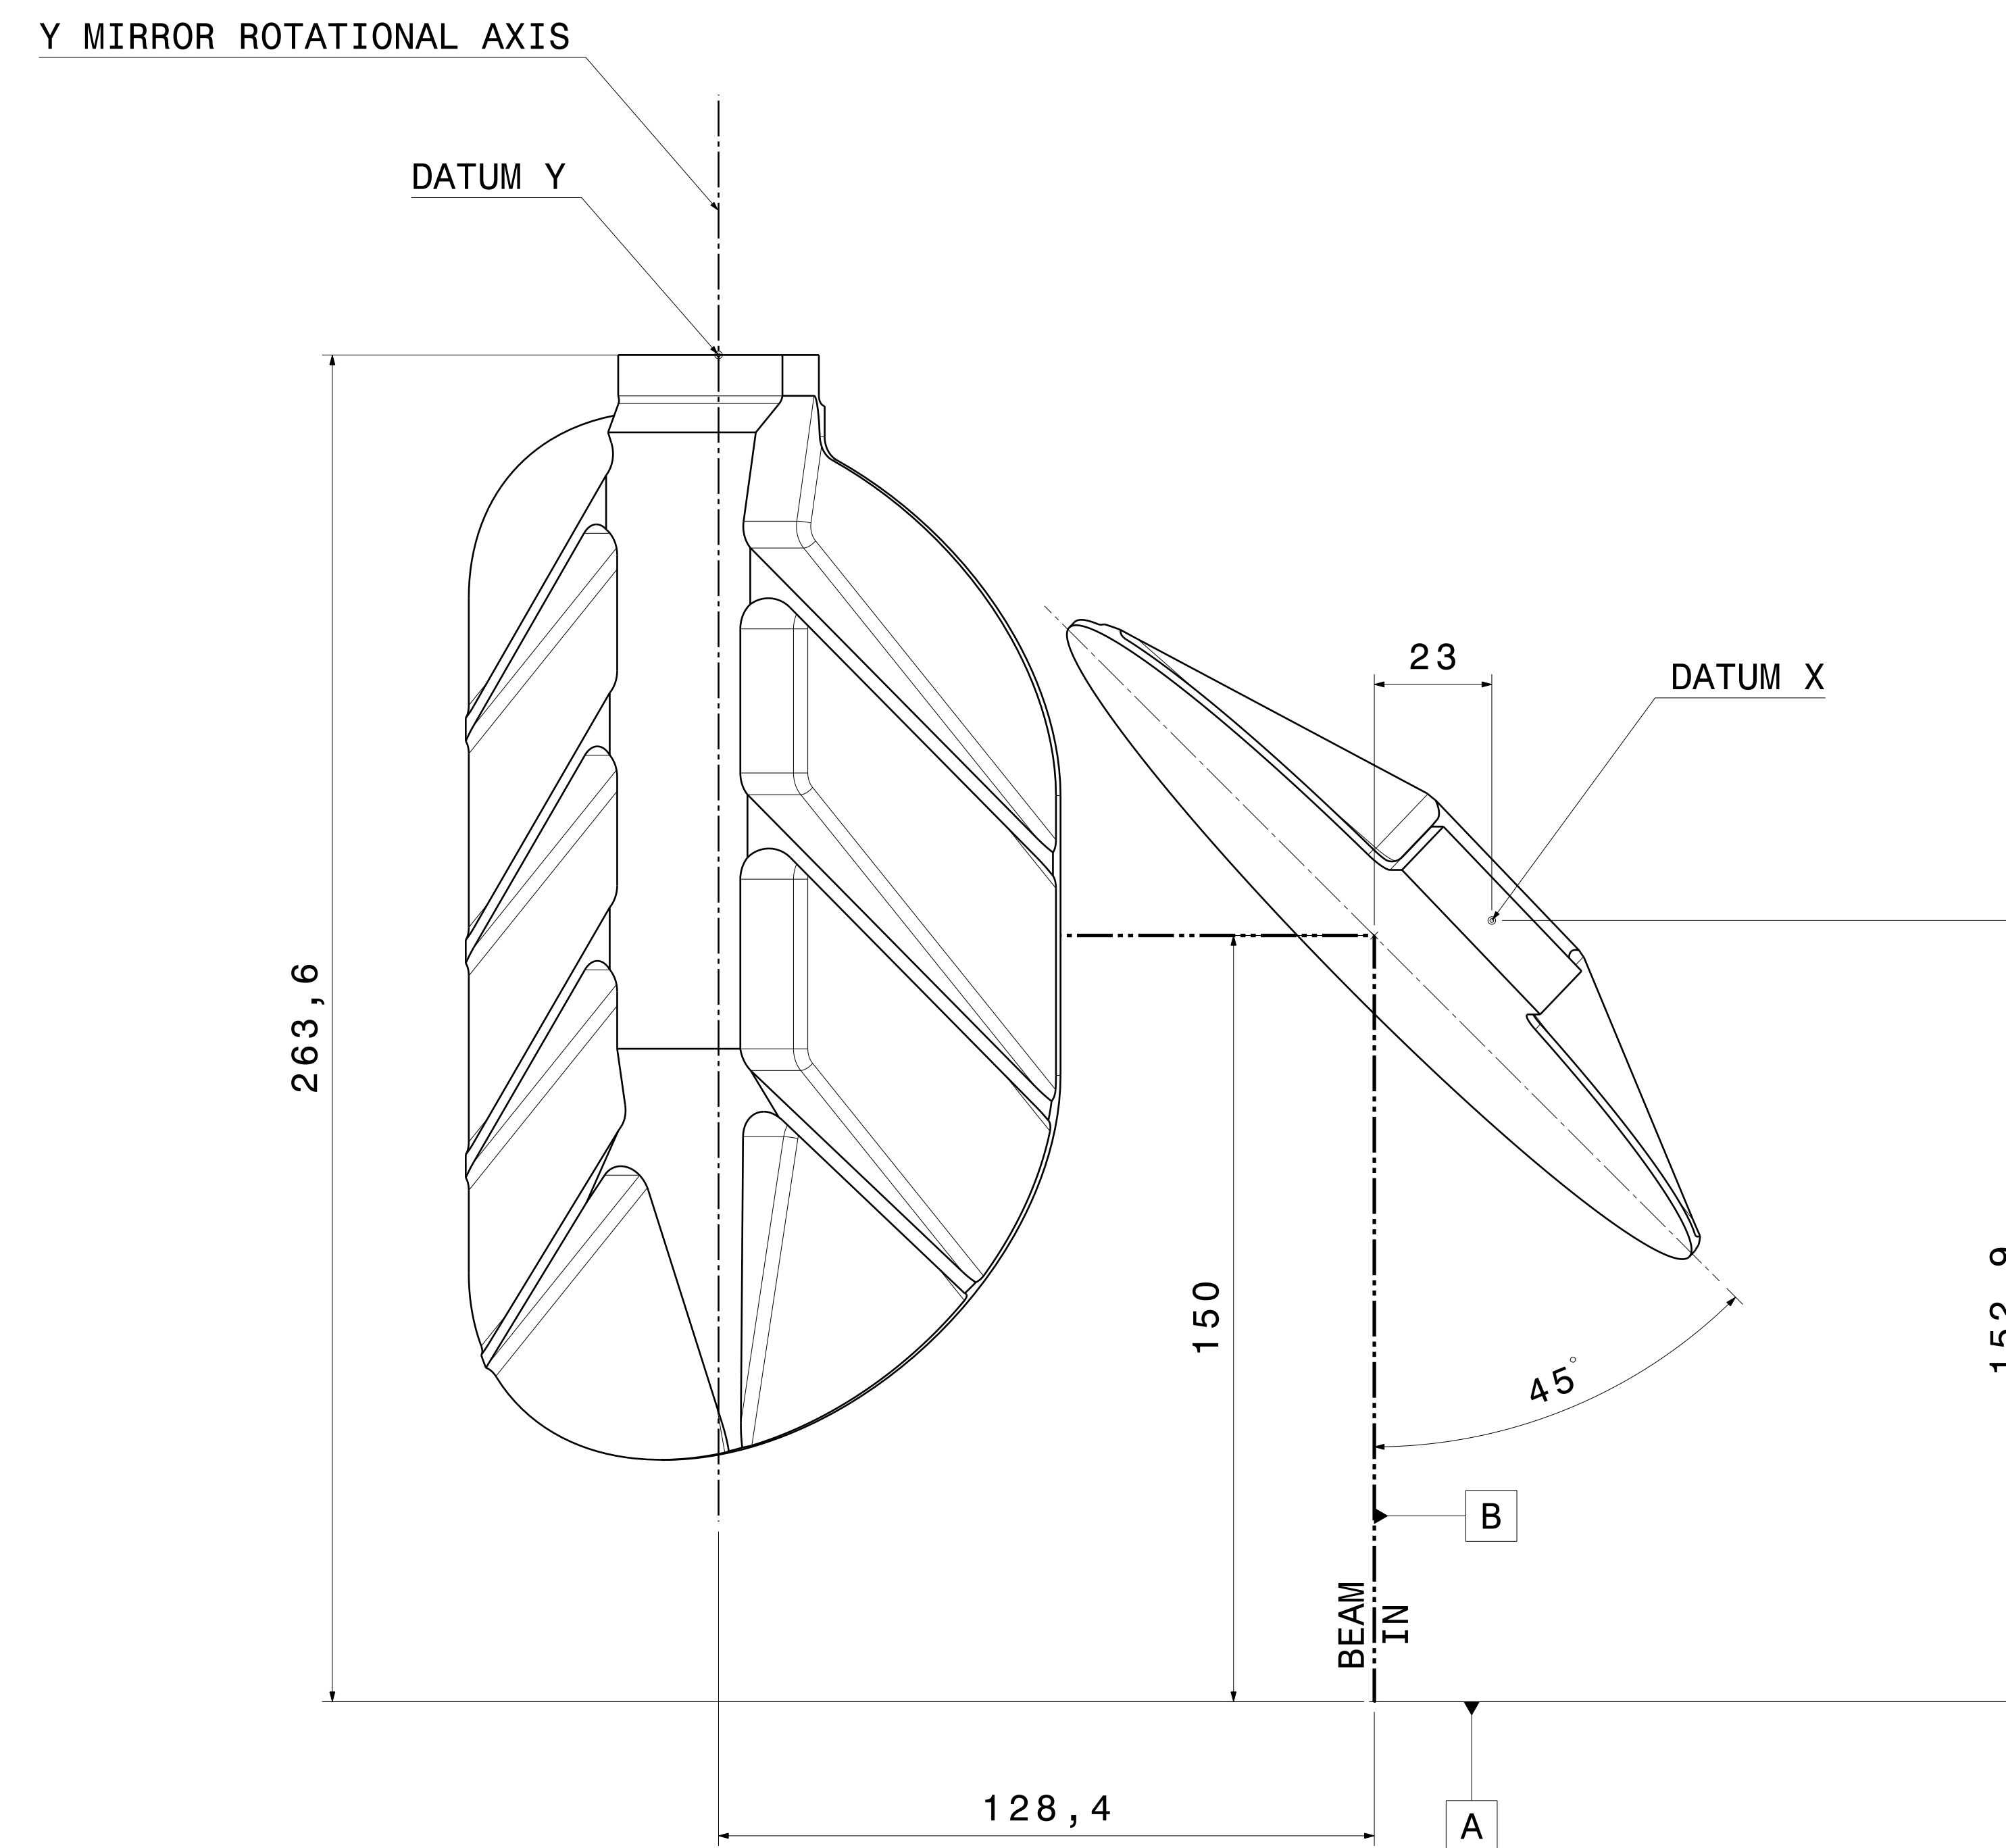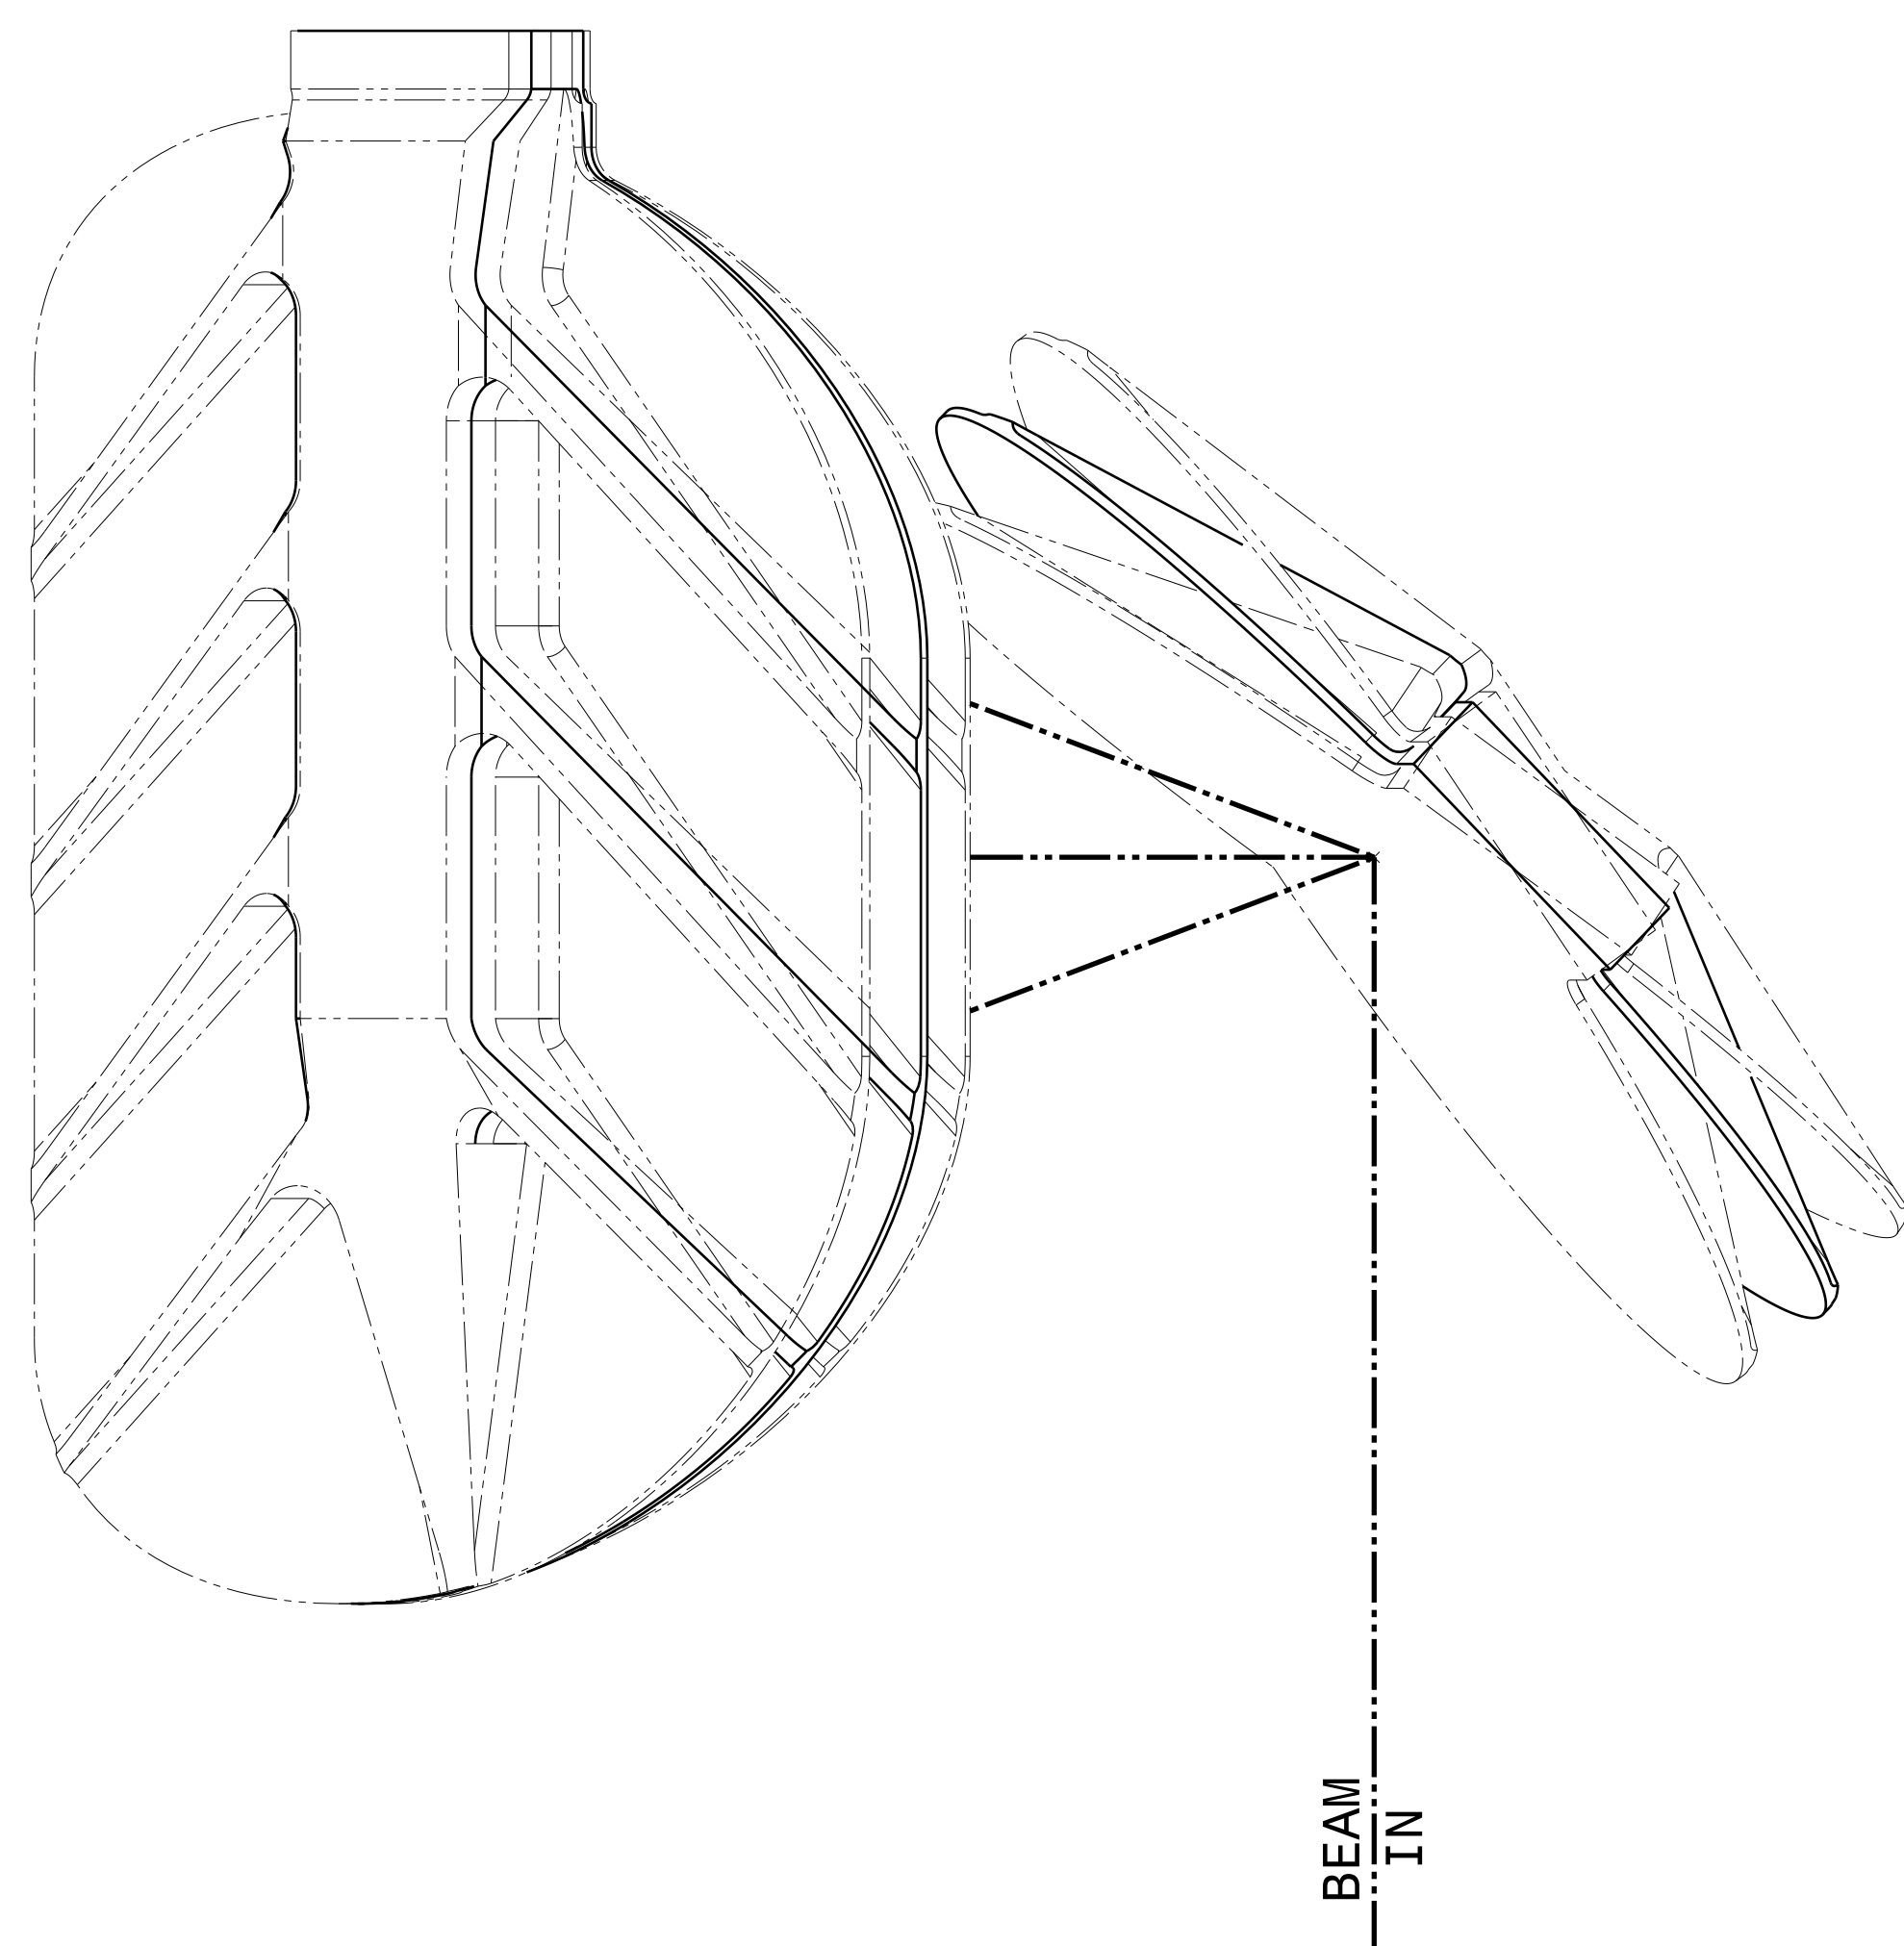

5. USE ±15° MECHANICAL GALVO BUMPERS
4. FULL BEAM DIAMETER AT OUTPUT SURFACE OF FINAL OBJECTIVE=100.00mm. FOCAL LENGTH f5,000mm TO f10,000mm
3. DATUM SYSTEM:
 - A=□ = PLANE NORMAL TO "BEAM-IN" AXIS AT OUTPUT SURFACE OF FINAL OBJECTIVE LENS 150mm FROM X MIRROR.
 - B=□ = PLANE NORMAL TO DATUM A THROUGH "BEAM-IN" AXIS AND PARALLEL TO "BEAM-OUT" AXIS.
 - C=□ = PLANE NORMAL TO DATUMS A & B, THROUGH INTERSECT POINT OF "BEAM-IN" AXIS AND X MIRROR OPTICAL FACE.
 - X=• = INTERSECT POINT OF X MIRROR ROTATIONAL AXIS AND MOUNT REAR FACE.
 - Y=• = INTERSECT POINT OF Y MIRROR ROTATIONAL AXIS AND MOUNT REAR FACE.
2. TOLERANCES NOT STATED:
 - LENGTHS <50mm = ±0,2mm
 - LENGTHS >50mm AND <150mm = ±0,3mm
1. ALL DATA EXCEPT TOLERANCED DIMENSIONS, DATUM AND SYSTEM INFORMATION SHOWN IN THIS DRAWING IS REF.ONLY. SEE SOLID MODEL FOR MASTER GEOMETRY.

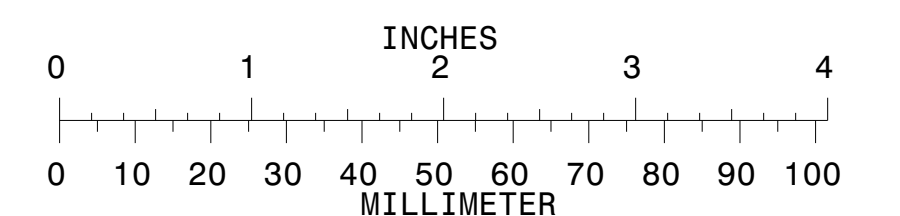

COMPUTER PRODUCED DRAWING USING CATIA V5. NO MANUAL ALTERATION

This document and all information contained herein is the sole property of optoSiC GmbH. No intellectual property rights are granted by the delivery of this document or the disclosure of its content. This document shall not be reproduced or disclosed to a third party without the express written consent of optoSiC GmbH. This document and its content shall not be used for any purpose other than that for which it is supplied. The statements made herein do not constitute an offer. They are based on the mentioned assumptions and are expressed in good faith. Where the supporting grounds for these statements are not known, optoSiC GmbH will be pleased to explain the basis thereof. © optoSiC GmbH(2009) All rights reserved. Confidential and proprietary document.

LIMITS NOT STATED:	SURFACE FINISH:	FIRST ANGLE PROJECTION
ISO 8015	ISO 8015	ISO 8015
DRAWN	NAME	DATE
ASPINDE	ASPINDE	20.07.2009
STRESS	DATE	MATERIAL NUMBER:
APPROVED	S.HASTINGS	20.07.2009
TITLE		DRAWING NUMBER
XY100G LAYOUT		XY100G LAYOUT